


Lithurin® Hard

Lithurin® Hard is a deeply penetrating fluid hardener that reacts and strengthens the structure of concrete surfaces.

Lithurin® HARD is an impregnator, does not form a surface film and hardens the concrete surface.

Lithurin® Hard is water-based and does not change the concrete's colour. The concrete becomes more resistant to abrasion.

A one-off application provides long-term protection. Lithurin® HARD is emissions tested: result (Indoor Air Comfort Gold.)

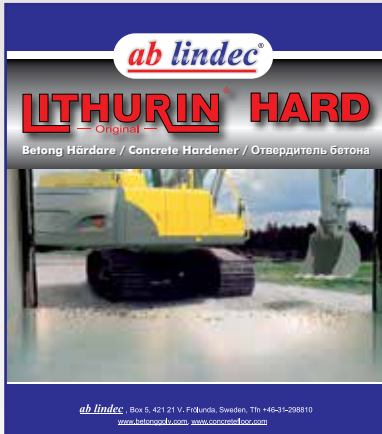

Area of application

- Hardening of concrete surfaces indoors and outdoors.
- Used in combination with Lithurin® DENS, SEAL, PROTEC.
- Hardens the concrete surface prior to diamond grinding.

Environmental benefits Lithurin® Hard

- Indoor Air Comfort Gold.
- Water-based.
- Odourless.

Benefits Lithurin® Hard

- Maximises abrasive resistance for the concrete surface.
- Durable – a one-off application provides long-term protection against abrasion.
- Fast drying time – dry after 30 minutes, at a temp. of +15-18°.
- Can be used on new or existing concrete.

Equipment needed

- Low-pressure sprayer.
- LC Rider Pad 320.
- Combi scouring machine/wet vacuum cleaner.



Requirements for treatment with Lithurin® Hard

- Min. temp +5° on the surface of the concrete (equivalent to an air temp. of +10°).
- The surface must be free of contaminants.
- In treatment of old floors, the surface must be grinded clean before application.

ab lindec® endeavours to provide correct information about technical properties and handling of its products. However, while ab lindec® has no control over the way in which the products are mixed and laid, or the conditions under which they set, ab lindec® can in no way be held responsible. ab lindec® is only responsible for the quality of the products at the time of delivery.